

PARAMETERS

Impedance	8 ohms
Re	7.147 ohms
Le	0.28 mH @ 1 kHz
Fs	298 Hz
Qms	N/A
Qes	N/A
Qts	N/A
Mms	0.77 g
Cms	0.534 mm/N
Sd	N/A
Vd	N/A
BL	2.999 Tm
Vas	N/A
Xmax	N/A
VC Diameter	25 mm
SPL	N/A
RMS Power Handling	5 watts
Usable Frequency Range (Hz)	N/A

FEATURES

- Turn any solid surface into a great sounding speaker system
- Create a completely hidden surround sound system
- 3M adhesive pads for secure and fast placement
- Wideband frequency response (dependent on attached material)

APPLICATIONS


- Invisible home theater and multi-room audio
- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio
- Bathroom tubs and showers

IMPEDANCE/PHASE



Measurement taken with transducer uncoupled facing upward.

FREQUENCY RESPONSE

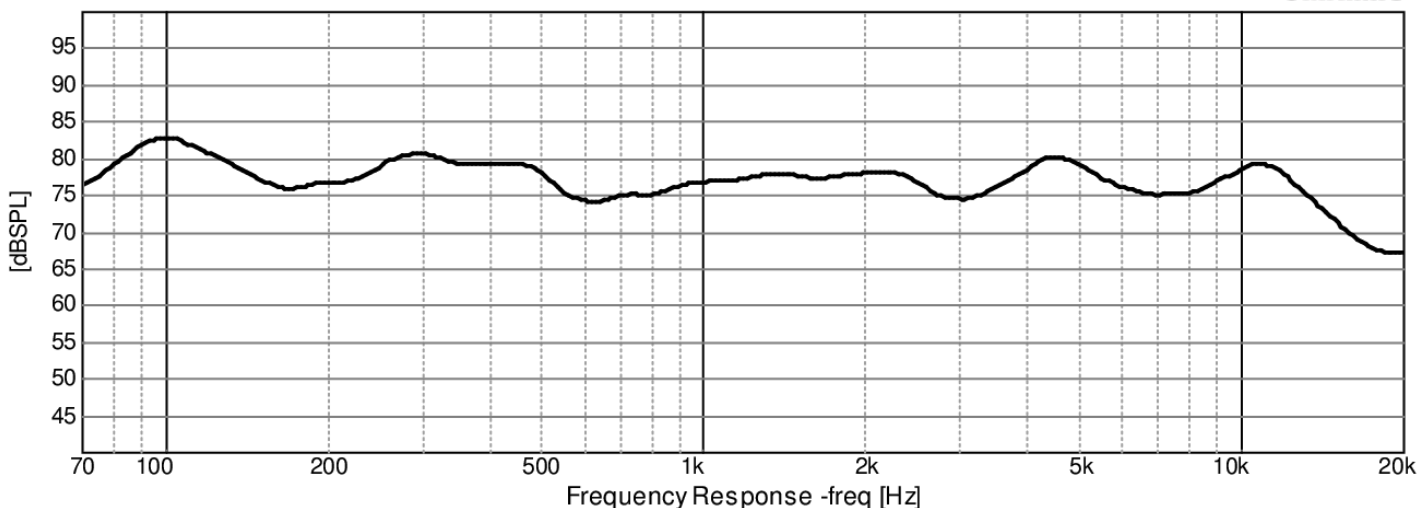

OmniMic

1/3rd octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.