



8MB450 v2

Professional Low Frequency Driver



KEY FEATURES

- 2" Voice coil
- 225 Watts continuous power handling
- 93.5 dB Sensitivity
- 75-7,500 Hz

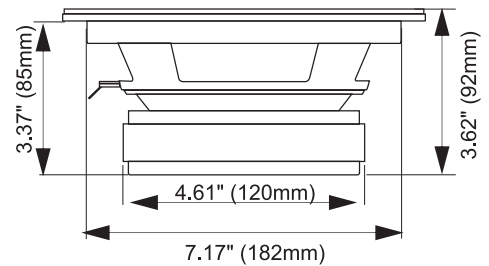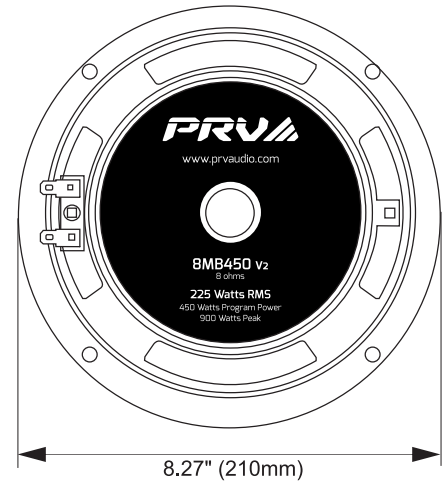

GENERAL SPECIFICATIONS

Nominal Diameter	8" (203 mm)
Nominal impedance	8 ohms
Rated Power Handling	225 Watts
Program Power	450 Watts
Sensitivity 2.83V at 1m	93.5 dB
Recommended Hi Pass Crossover*	120 Hz*
<small>*For Full Power Handling</small>	<small>*12db Per Octave Crossover</small>
Frequency Response at -10dB	75 - 7,500 Hz
Voice Coil Diameter	2" (50 mm)
Voice Coil Wire	CCAW
Voice Coil Winding Depth	12.0 mm
Former Material	Kapton
Magnetic Gap Depth	6.0 mm
Frame Material	Stamped Steel


THIELE-SMALL PARAMETERS

Equivalent Volume	Vas	18.18 l
Excursion (mathematical)***	Xmax	4.5 mm
Free Air Resonance	Fs	74.72 Hz
Mechanical Factor	Qms	26.56
Electrical Factor	Qes	1.09
Total Factor	Qts	1.05
Cone Area	Sd	241 cm ²
Mechanical Mass	Mms	20.14 g
Bl Factor	BL	7.37 Tm
Dc Resistance	Re	6.3 Ohms
Inductance	Le	0.25 mH at 1 kHz
Mechanical Mass Without Air	Mmd	18.03 g
Mechanical Compliance	Cms	0.225 mm/N

EXTRA INFO

Overall Diameter	8.27" (210 mm)
Front Mount Baffle Cutout	7.17" (182 mm)
Mounting Depth	3.31" (84 mm)
Overall Depth	3.61" (91.5 mm)
Net Weight	4.10 Lbs (1.86 kg)
Shipping Weight	4.54 Lbs (2.06 kg)
Carton Dimensions W x L x H	9.05" x 9.05" x 4.72" (230 x 230 x 120mm)

Frequency Response Measured at 2.83V/1m

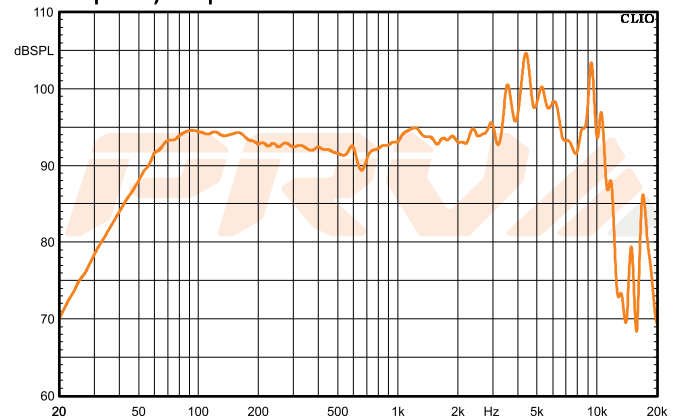

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
 FORT LAUDERDALE, FL SAO LEOPOLDO, RS
 support@prvaudio.com vendas@pvaudio.com.br
 www.prvaudio.com www.pvaudio.com.br

***Xmax=(Voice coil winding depth-Magnetic Gap depth)/2+ Mgnetic Gap Depth/4